

The filing cabinets
range certified for up
to one or to two hours
protection against fire



Fire File 31"

FIRE RESISTANT DOCUMENT PROTECTION

Key features

Certified according to UL standard 72 in Class 350
Endurance in both 1 hour and 2 hour durations.

Maximised storage capacity that allows users to
gain full advantage for their storage requirements.
Chubb safes Fire File 31" is available with 2, 3 or 4
drawers.

On the two-hour certified models, each drawer is
protected from fire. Even if one of the drawers is
accidentally left open, the other closed drawers
are still protected by the built in fire resistance
partitions

Easy operable day catch to secure the drawers when
closed. Units do not have to be locked to provide fire
protection but just be pushed closed

High-quality steel sliders to ensure comfortable
operation and full drawer access

Lighter weight construction which means smoother
transportation and installation

Interlocking system that prevents more than one
drawer being open at once and eliminates risk of
tipping

All models fitted with high-security locks as
standard


Light grey, powder-coated finish and modern design
which blends nicely into any office environment

Chubb safes Fire File 31" is manufactured in
accordance with ISO 9001 for quality management
systems and ISO 14001 for environmental
management systems

Chubb safes
Trusted the world over.

Product Specification

| Model | External (mm) | | | Drawer dimensions (mm) | | | Weight (kg) | Capacity (litres) |
|---|---------------|-------|-------|------------------------|-------|-------|-------------|-------------------|
| | Height | Width | Depth | Height | Width | Depth | | |
| Chubbsafes Fire File 31" 1 hour | | | | | | | | |
| 2 drawers | 784 | 551 | 779 | 290 | 387 | 604 | 194 | 136 |
| 3 drawers | 1147 | 551 | 779 | 290 | 387 | 604 | 268 | 204 |
| 4 drawers | 1510 | 551 | 779 | 290 | 387 | 604 | 321 | 272 |
| Chubbsafes Fire File 31" 2 hours | | | | | | | | |
| 2 drawers | 784 | 551 | 779 | 290 | 387 | 604 | 197 | 136 |
| 3 drawers | 1147 | 551 | 779 | 290 | 387 | 604 | 273 | 204 |
| 4 drawers | 1510 | 551 | 779 | 290 | 387 | 604 | 328 | 272 |

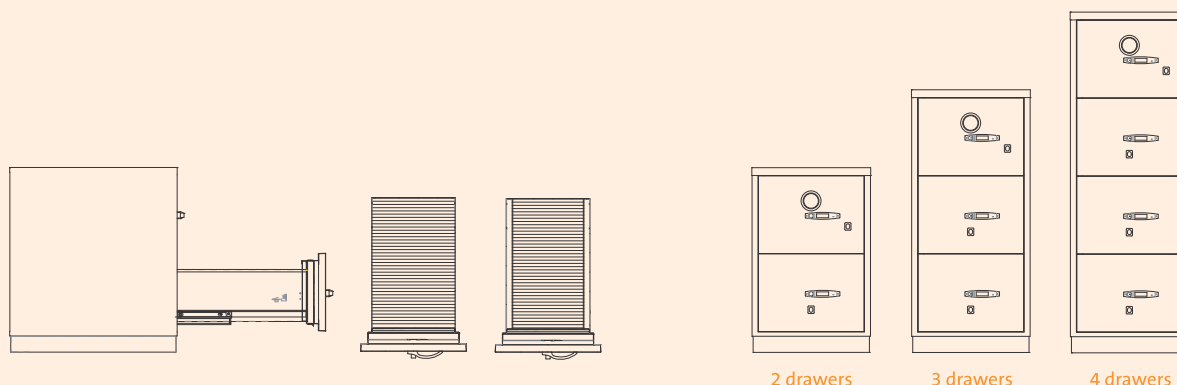

2 drawers

3 drawers

4 drawers

Lock Options



Combination lock



Key lock

Chubbsafes Fire File 31" models are fitted with high-security locks as standard. They can be equipped with a central key lock for single locking or together with a mechanical combination lock for dual central locking. In addition each individual drawer can be fitted with a key lock.

Finish

Color: Light Grey RAL 7035

Fire Testing

The Chubbsafes Fire File 31" cabinets are tested and certified according to the most common and well-established UL (Underwriter's Laboratories) Standard 72 to Class 350 Fire Endurance for both 1 hour and 2 hour durations. The products are subjected to extensive fire testing which simulates the impact of a severe fire. This two-step process includes the following:

Step 1

The filing cabinet is placed in a furnace and heated to a temperature of 1000°C or over, depending on the certification level. The furnace is switched off after one hour or two hours, depending on the certification level. The unit remains in the furnace until the temperature returns to ambient levels. The content is then examined for signs of damage. Both during furnace heating and the subsequent cooling period, the recorded internal temperature must not have exceeded 177°C (or 350°F).

Step 2

Fire explosion or Shock test. To simulate sudden heating, possibly as a result of rapid fire spread, the cabinet is inserted into a preheated furnace. The stresses and strains such rapid heating creates can easily cause a poorly constructed unit to fail. At all times internal temperatures are not allowed to exceed those set for the Step 1 fire endurance test.



Authorised dealer

AUS SAFES
QUALITY GUARANTEED

T : 1800 15 16 15

E : sales@aussafes.com.au

W : www.aussafes.com.au

Chubbsafes
Trusted the world over.

www.chubbsafes.com

Chubb is owned by Chubb plc and is a registered trademark used under license